
# T HMO HB

Screw-in socket, T shaped

## Properties

| | |
|---|---|
| **Connection 1** | metric cylindrical outer thread |
| **Sealing form 1** | Shape F |
| **Connection 2 + 3** | BSP cylindrical external threads |
| **Sealing form 2 + 3** | 60° inner cone |
| **Design** | Adjustable direction screw-in socket |
| **Construction** | T shaped |
| **Material** | Steel |
| **Surface** | electro galvanised |



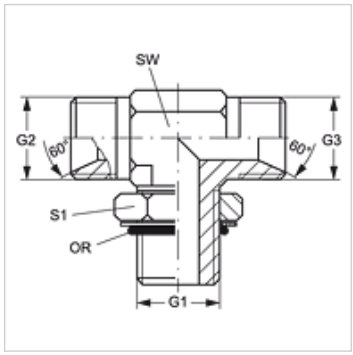


## Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|---|---|---|---|---|---|
| **T HMO 12 HB 04** | M 12 x 1.5 | G 1/4" -19 | 13 | 18 | 9.3 x 2.4 |
| **T HMO 14 HB 04** | M 14 x 1.5 | G 1/4" -19 | 14 | 20 | 11.3 x 2.4 |
| **T HMO 14 HB 06** | M 14 x 1.5 | G 3/8" -19 | 19 | 20 | 11.3 x 2.4 |
| **T HMO 16 HB 06** | M 16 x 1.5 | G 3/8" -19 | 19 | 22 | 13.3 x 2.4 |
| **T HMO 18 HB 06** | M 18 x 1.5 | G 3/8" -19 | 19 | 24 | 15.3 x 2.4 |
| **T HMO 18 HB 08** | M 18 x 1.5 | G 1/2" -14 | 19 | 24 | 15.3 x 2.4 |
| **T HMO 22 HB 12** | M 22 x 1.5 | G 3/4" -14 | 27 | 28 | 19.3 x 2.4 |

SW, S1, S2 = With across flats

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*