


# T HMOK HB

Screw-in socket, T shaped

## Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	Thread socket with O-ring + spacer diaphragm ring
<b>Connection 2 + 3</b>	BSP cylindrical external threads
<b>Sealing form 2 + 3</b>	60° inner cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	T shaped
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

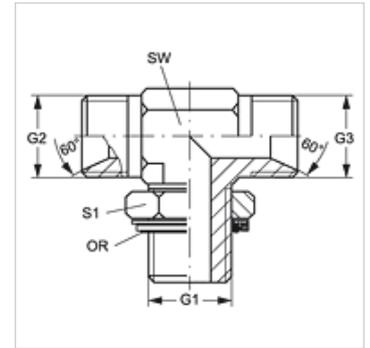

## Item

Identification	G1	G2 + G3	AF (mm)	S1	OR
<b>T HMOK 12 HB 04</b>	M 12 x 1.5	G 1/4" -19	13	18	9.3 x 2.4
<b>T HMOK 14 HB 04</b>	M 14 x 1.5	G 1/4" -19	14	20	11.3 x 2.4
<b>T HMOK 14 HB 06</b>	M 14 x 1.5	G 3/8" -19	14	20	11.3 x 2.4
<b>T HMOK 16 HB 06</b>	M 16 x 1.5	G 3/8" -19	19	22	13.3 x 2.4
<b>T HMOK 18 HB 06</b>	M 18 x 1.5	G 3/8" -19	19	24	15.3 x 2.4
<b>T HMOK 18 HB 08</b>	M 18 x 1.5	G 1/2" -14	19	24	15.3 x 2.4
<b>T HMOK 22 HB 12</b>	M 22 x 1.5	G 3/4" -14	22	28	19.3 x 2.4
<b>T HMOK 26 HB 12</b>	M 26 x 1.5	G 3/4" -14	32	28	23.5 x 2.6

SW, S1, S2 = With across flats

## Spare parts

**KAMRING M** Diaphragm ring, metric