


T HROK HJ VA

Screw-in socket, T shaped

HANSA**FLEX**

Properties

| | |
|--------------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Thread socket with O-ring + spacer diaphragm ring |
| Connection 2 + 3 | UN/UNF external threads |
| Sealing form 2 + 3 | 74° outer cone |
| Design | Adjustable direction screw-in socket |
| Construction | T shaped |
| Material | Stainless steel |

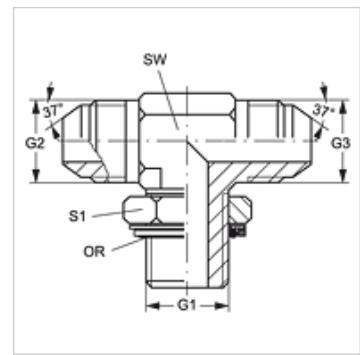

Ordering information

Seals of NBR

FPM (Viton) on request

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|---------------------------|------------|--------------|------------|----|--------------|
| T HROK 06 HJ 08 VA | G 3/8" -19 | 3/4"-16 UNF | 22 | 22 | 13.94 x 2.62 |
| T HROK 02 HJ 04 VA | G 1/8" -28 | 7/16"-20 UNF | 11 | 14 | 8.00 x 2.00 |
| T HROK 04 HJ 06 VA | G 1/4" -19 | 9/16"-18 UNF | 14 | 19 | 10.77 x 2.62 |

SW, S1, S2 = With across flats

Product versions

T HROK HJ Screw-in socket, T shaped, Steel

Spare parts

KAMMRING G Spacer diaphragm ring, imperial