T IR AJ HJ


Adapter for test connection

HANSA-FLEX

Properties

Connection 1	BSP cylindrical internal threads
Connection 2	UN/UNF nut threads
Sealing form 2	74° inner cone
Connection 3	UN/UNF external threads
Sealing form 3	74° outer cone
Design	Adapter for test connection
Construction	T shaped
Material	Steel
Surface	electro galvanised



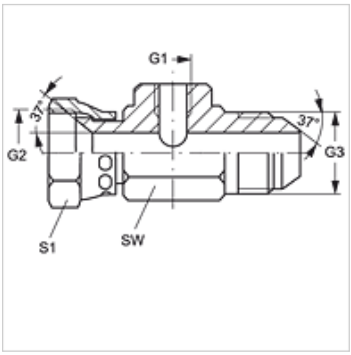

Item

Identification	G1	G2 + G3	Max. working pressure (bar)	AF (mm)	S1
T 04 IR AJ 05 HJ	G 1/4" -19	1/2"-20 UNF	420	36	17
T 04 IR AJ 08 HJ	G 1/4" -19	3/4"-16 UNF	350	36	22
T 04 IR AJ 10 HJ	G 1/4" -19	7/8"-14 UNF	350	36	27
T 04 IR AJ 12 HJ	G 1/4" -19	1.1/16" -12 UN	350	41	32
T 04 IR AJ 16 HJ	G 1/4" -19	1.5/16" -12 UN	250	46	38
T 04 IR AJ 20 HJ	G 1/4" -19	1.5/8" -12 UN	250	50	50
T 04 IR AJ 24 HJ	G 1/4" -19	1.7/8" -12 UN	170	60	60

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.