


T O HB

Screw-in socket, T shaped

HANSA FLEX

Properties

| | |
|---------------------------|--------------------------------------|
| Connection 1 | UN/UNF external threads |
| Sealing form 1 | O-ring seal on screw-in socket |
| Connection 2 + 3 | BSP cylindrical external threads |
| Sealing form 2 + 3 | 60° inner cone |
| Design | Adjustable direction screw-in socket |
| Construction | T shaped |
| Material | Steel |
| Surface | electro galvanised |

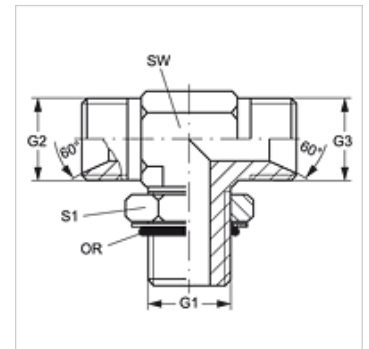

Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|---------------------|----------------|------------|------------|----|--------------|
| T O 06 HB 04 | 9/16"-18 UNF | G 1/4" -19 | 14 | 17 | 11.90 x 1.98 |
| T O 06 HB | 9/16"-18 UNF | G 3/8" -19 | 14 | 17 | 11.90 x 1.98 |
| T O 08 HB | 3/4"-16 UNF | G 1/2" -14 | 19 | 22 | 16.36 x 2.20 |
| T O 10 HB 12 | 7/8" -14 UNF | G 3/4" -14 | 22 | 27 | 19.18 x 2.46 |
| T O 12 HB | 1.1/16" -12 UN | G 3/4" -14 | 27 | 32 | 23.47 x 2.95 |
| T O 16 HB 12 | 1.5/16" -12 UN | G 3/4" -14 | 33 | 38 | 29.74 x 2.95 |

SW, S1, S2 = With across flats