


# T O HB

Screw-in socket, T shaped

## Properties

<b>Connection 1</b>	UN/UNF external threads
<b>Sealing form 1</b>	O-ring seal on screw-in socket
<b>Connection 2 + 3</b>	BSP cylindrical external threads
<b>Sealing form 2 + 3</b>	60° inner cone
<b>Design</b>	Adjustable direction screw-in socket
<b>Construction</b>	T shaped
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

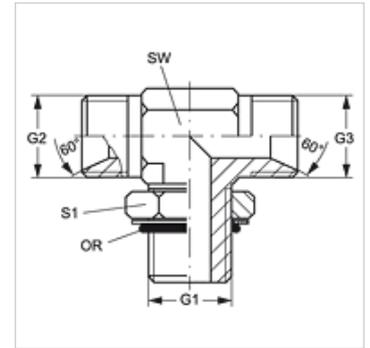

## Item

Identification	G1	G2 + G3	AF (mm)	S1	OR
<b>T O 06 HB 04</b>	9/16"-18 UNF	G 1/4" -19	14	17	11.90 x 1.98
<b>T O 06 HB</b>	9/16"-18 UNF	G 3/8" -19	14	17	11.90 x 1.98
<b>T O 08 HB</b>	3/4"-16 UNF	G 1/2" -14	19	22	16.36 x 2.20
<b>T O 10 HB 12</b>	7/8" -14 UNF	G 3/4" -14	22	27	19.18 x 2.46
<b>T O 12 HB</b>	1.1/16" -12 UN	G 3/4" -14	27	32	23.47 x 2.95
<b>T O 16 HB 12</b>	1.5/16" -12 UN	G 3/4" -14	33	38	29.74 x 2.95

SW, S1, S2 = With across flats