
# T O HJ VA

Screw-in socket, T shaped

## Properties

| | |
|---|---|
| **Connection 1** | UN/UNF external threads |
| **Sealing form 1** | O-ring seal on screw-in socket |
| **Connection 2 + 3** | UN/UNF external threads |
| **Sealing form 2 + 3** | 74° outer cone |
| **Design** | Adjustable direction screw-in socket |
| **Construction** | T shaped |
| **Material** | Stainless steel |



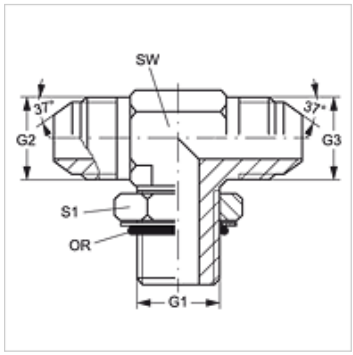


## Ordering information

Seals of NBR

FPM (Viton) on request

## Item

| Identification | G1 | G2 + G3 | AF (mm) | S1 | OR |
|---|---|---|---|---|---|
| **T O 04 HJ VA** | 7/16"-20 UNF | 7/16"-20 UNF | 11 | 14 | 8.92 x 1.83 |
| **T O 06 HJ VA** | 9/16"-18 UNF | 9/16"-18 UNF | 14 | 17 | 11.90 x 1.98 |
| **T O 08 HJ VA** | 3/4"-16 UNF | 3/4"-16 UNF | 19 | 22 | 16.36 x 2.20 |

SW, S1, S2 = With across flats

## Product versions

| | |
|---|---|
| **T O HJ** | Screw-in socket, T shaped, Steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*