


HFM MK S

Measuring connection, plug-in series

HANSA FLEX

Properties

| | |
|------------------------|---|
| Connection 1 | metric cylindrical outer thread |
| Sealing form 1 | Shape B |
| Connection 2 | Plug connection for measuring technology |
| Design | Screw-in socket with measurement connection |
| Scope of supply | with locking connector and retaining pin |
| Temp. min. | -20 °C |
| Temp. max. | 100 °C |
| Material | Steel |
| Surface | electro galvanised |

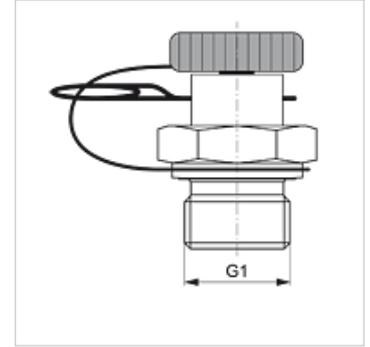

Item

| Identification | G1 | Max. working pressure (bar) |
|-----------------|------------|--------------------------------|
| HFM MK 08-1 S | M 8 x 1 | 400 |
| HFM MK 10-1 S | M 10 x 1 | 400 |
| HFM MK 12-1.5 S | M 12 x 1.5 | 400 |
| HFM MK 14-1.5 S | M 14 x 1.5 | 400 |
| HFM MK 18-1.5 S | M 18 x 1.5 | 400 |
| HFM MK 20-1.5 S | M 20 x 1.5 | 400 |
| HFM MK 22-1.5 S | M 22 x 1.5 | 400 |
| HFM MK 26-1.5 S | M 26 x 1.5 | 400 |
| HFM MK 27-2 S | M 27 x 2 | 400 |
| HFM MK 33-2 S | M 33 x 2 | 400 |
| HFM MK 42-2 S | M 42 x 2 | 250 |
| HFM MK 48-2 S | M 48 x 2 | 250 |

Spare parts

| | |
|---------------|---|
| HFM ST | Locking connector for plug-in coupling DN 2 |
|---------------|---|