


### Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	Shape B
Connection 2	Measuring connection M 16 x 2
Design	Screw-in socket with measurement connection
Scope of supply	with cap
Temp. min.	-25 °C
Temp. max.	100 °C
Material	Steel
Surface	electro galvanised

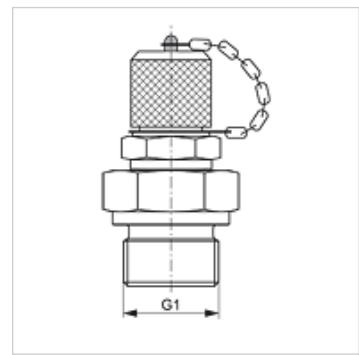

### Item

Identification	G1	Max. working pressure (bar)
HFM MKR 1/8	G 1/8" -28	400
HFM MKR 1/4	G 1/4" -19	630
HFM MKR 3/8	G 3/8" -19	630
HFM MKR 1/2	G 1/2" -14	630
HFM MKR 3/4	G 3/4" -14	400
HFM MKR 1	G 1" -11	400
HFM MKR 1 1/4	G 1 1/4" -11	250
HFM MKR 1 1/2	G 1 1/2" -11	250

### Spare parts

HFM VK Cap