


HFM MKR S

Measuring connection, plug-in series

HANSA FLEX

Properties

| | |
|-----------------|---|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Shape B |
| Connection 2 | Plug connection for measuring technology |
| Design | Screw-in socket with measurement connection |
| Scope of supply | with locking connector and retaining pin |
| Temp. min. | -20 °C |
| Temp. max. | 100 °C |
| Material | Steel |
| Surface | electro galvanised |

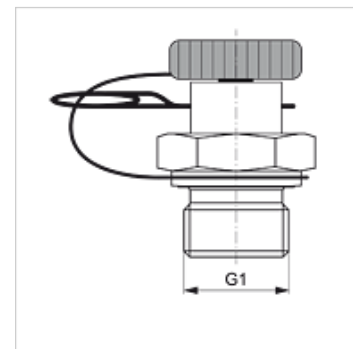

Item

| Identification | G1 | Max. working pressure (bar) |
|-----------------|--------------|--------------------------------|
| HFM MKR 1/8 S | G 1/8" -28 | 400 |
| HFM MKR 1/4 S | G 1/4" -19 | 400 |
| HFM MKR 3/8 S | G 3/8" -19 | 400 |
| HFM MKR 1/2 S | G 1/2" -14 | 400 |
| HFM MKR 3/4 S | G 3/4" -14 | 400 |
| HFM MKR 1 S | G 1" -11 | 400 |
| HFM MKR 1 1/4 S | G 1.1/4" -11 | 400 |
| HFM MKR 1 1/2 S | G 1.1/2" -11 | 400 |

Spare parts

| | |
|--------|---|
| HFM ST | Locking connector for plug-in coupling DN 2 |
|--------|---|