


HFM MMA S

Pressure gauge connection

Properties

| | |
|--------------------------|--|
| Connection 1 | BSP cylindrical internal threads |
| Sealing form 1 | O-ring seal |
| Connection 2 | Plug connection for measuring technology |
| Design | Screw-on socket with measuring connector |
| Construction type | for bulkhead mounting |
| Scope of supply | with lock nut and O-ring |
| Temp. min. | -20 °C |
| Temp. max. | 100 °C |
| Material | Steel |
| Surface | electro galvanised |

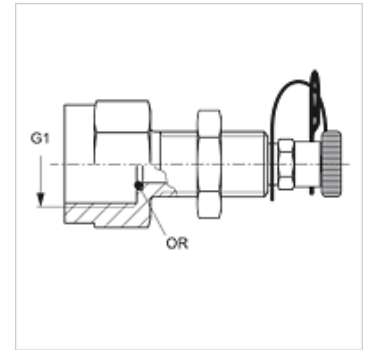

Item

| Identification | G1 | Max. working pressure (bar) | OR |
|----------------|------------|-----------------------------|-----------|
| HFM MMA 1/4 S | G 1/4" -19 | 400 | 5.0 x 1.5 |
| HFM MMA 1/2 S | G 1/2" -14 | 400 | 9.0 x 1.8 |

Product versions

HFM MMA S VA Pressure gauge connection, Stainless steel

Spare parts

HFM ST Locking connector for plug-in coupling DN 2