

# HFM T HL VA / HFM T HS VA

Measuring connection, M16 x 2 series

**HANSA FLEX**

## Properties

**Connection 1 + 2** metric cylindrical outer thread

**Sealing form 1 + 2** 24° inner cone

**Connection 3** Measuring connection M 16 x 2

**Construction** T shaped


**Standard** DIN 2353  
ISO 8434-1

**Scope of supply** with cap

**Temp. min.** -20 °C

**Temp. max.** 100 °C

**Material** Stainless steel

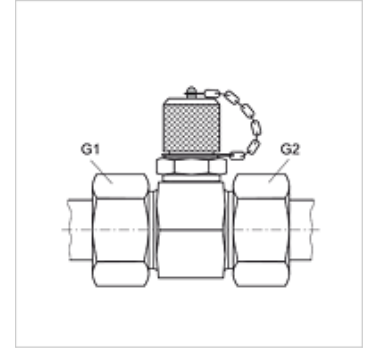

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	External pipe Ø (mm)	G1 + G2	Max. working pressure (bar)
HFM T HL 04 VA	L	6	M 12 x 1.5	315
HFM T HL 06 VA	L	8	M 14 x 1.5	315
HFM T HL 08 VA	L	10	M 16 x 1.5	315
HFM T HL 10 VA	L	12	M 18 x 1.5	315
HFM T HL 13 VA	L	15	M 22 x 1.5	315
HFM T HL 16 VA	L	18	M 26 x 1.5	315
HFM T HL 20 VA	L	22	M 30 x 2	160
HFM T HL 25 VA	L	28	M 36 x 2	160
HFM T HL 32 VA	L	35	M 45 x 2	160
HFM T HL 40 VA	L	42	M 52 x 2	160
HFM T HS 03 VA	S	6	M 14 x 1.5	630
HFM T HS 04 VA	S	8	M 16 x 1.5	630
HFM T HS 06 VA	S	10	M 18 x 1.5	630
HFM T HS 08 VA	S	12	M 20 x 1.5	630
HFM T HS 10 VA	S	14	M 22 x 1.5	630
HFM T HS 13 VA	S	16	M 24 x 1.5	400
HFM T HS 16 VA	S	20	M 30 x 2	400
HFM T HS 20 VA	S	25	M 36 x 2	400
HFM T HS 25 VA	S	30	M 42 x 2	400
HFM T HS 32 VA	S	38	M 52 x 2	315

Series: LL = Very light L = Light S = Heavy

## Product versions

**HFM T HL / HFM T HS** Measuring connection, M16 x 2 series, Steel

**XHFM T HL VA / XHFM T HS VA** Measuring connection, M16 x 2 series, Stainless steel