
MVO
Pressure gauge connection fitting

HANSA-FLEX

Properties

Connection 1	BSP cylindrical internal threads
Sealing form 1	Edge sealing ring
Connection 2	metric nut thread
Sealing form 2	24° outer cone with O-ring
Design	Pressure gauge connection fitting
Scope of supply	with edge sealing ring
Material	Steel
Surface	electro galvanised



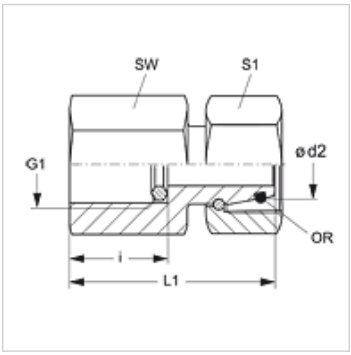

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Ø d2 (mm)	Operating pressure	G1	i (mm)	L1 (mm)	AF (mm)	S1	OR
MVO NW 04 L	L	6	PN 315	G 1/4" -19	14,5	36,5	19	14	4.0 x 1.5
MVO NW 06 L	L	8	PN 315	G 1/4" -19	14,5	36,5	19	17	6.0 x 1.5
MVO NW 08 L	L	10	PN 315	G 1/4" -19	14,5	36,0	19	19	7.5 x 1.5
MVO NW 10 L	L	12	PN 315	G 1/4" -19	14,5	37,5	19	22	9.0 x 1.5
MVO NW 03 S 1/4	S	6	PN 630	G 1/4" -19	14,5	35,5	19	17	4.0 x 1.5
MVO NW 03 S	S	6	PN 630	G 1/2" -14	20,0	43,5	27	17	4.0 x 1.5
MVO NW 04 S 1/4	S	8	PN 630	G 1/4" -19	14,5	35,5	19	19	6.0 x 1.5
MVO NW 04 S	S	8	PN 630	G 1/2" -14	20,0	43,0	27	19	6.0 x 1.5
MVO NW 06 S 1/4	S	10	PN 630	G 1/4" -19	14,5	36,0	19	22	7.5 x 1.5
MVO NW 06 S	S	10	PN 630	G 1/2" -14	20,0	45,0	27	22	7.5 x 1.5
MVO NW 08 S 1/4	S	12	PN 630	G 1/4" -19	14,5	39,0	19	24	9.0 x 1.5
MVO NW 08 S	S	12	PN 630	G 1/2" -14	20,0	44,5	27	24	9.0 x 1.5

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

MVO VA	Pressure gauge connection fitting, Stainless steel

Spare parts

DKI	Edge sealing ring for internal thread

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.