


Properties

| | |
|-----------------|-----------------------------------|
| Connection 1 | BSP cylindrical internal threads |
| Sealing form 1 | Sealed by copper ring |
| Connection 2 | ORFS external threads |
| Sealing form 2 | flat seal with O-ring |
| Design | Pressure gauge connection sockets |
| Scope of supply | with copper ring |
| Material | Steel |
| Surface | electro galvanised |

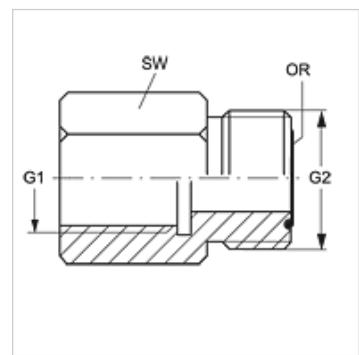

Item

| Identification | Max. working pressure (bar) | G1 | G2 | AF (mm) | OR |
|----------------|--------------------------------|------------|---------------|------------|--------------|
| MVR 04 HJOF | 400 | G 1/4" -19 | 9/16"-18 UNF | 17 | 7.65 x 1.78 |
| MVR 04 HJOF 06 | 400 | G 1/4" -19 | 11/16" -16 UN | 19 | 9.25 x 1.78 |
| MVR 04 HJOF 08 | 280 | G 1/4" -19 | 13/16" -16 UN | 22 | 12.42 x 1.78 |