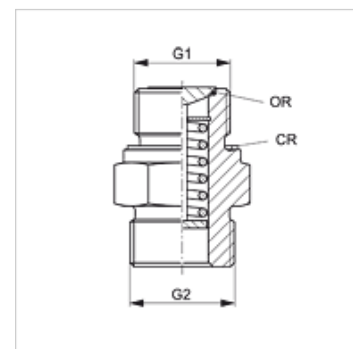


Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	Shape A
Connection 2	metric cylindrical outer thread
Design	Drain valve
Scope of supply	with copper ring and cap
Temp. min.	-30 °C
Temp. max.	200 °C

**Note**

Material for seal washer in protective cap: NBR.

Seal material on valve seat: FPM (Viton)

Description

The BOE oil drain screw is closed at rest (O-ring seal). When the oil drain hose is unscrewed, the valve is opened, allowing the oil to drain.

Item

Identification	G1	G2	Material
BOE 12-1.5	M 12 x 1.5	M 22 x 1.5	Steel
BOE 14-1.5	M 14 x 1.5	M 22 x 1.5	Steel
BOE 16-1.5	M 16 x 1.5	M 22 x 1.5	Steel
BOE 18-1.5	M 18 x 1.5	M 26 x 1.5	Steel
BOE 20-1.5	M 20 x 1.5	M 26 x 1.5	Steel
BOE 20-1.75	M 20 x 1.75	M 26 x 1.5	Steel
BOE 22-1.5	M 22 x 1.5	M 26 x 1.5	Steel
BOE 22-1.75	M 22 x 1.75	M 26 x 1.5	Steel
BOE 24-1.5	M 24 x 1.5	M 26 x 1.5	Brass
BOE 24-2	M 24 x 2	M 26 x 1.5	Brass
BOE 26-1.5	M 26 x 1.5	M 26 x 1.5	Brass
BOE 30-1.5	M 30 x 1.5	M 26 x 1.5	Brass
BOE 30-2	M 30 x 2	M 26 x 1.5	Brass
BOE 32-1.5	M 32 x 1.5	M 26 x 1.5	Brass
BOE 36-1.5	M 36 x 1.5	M 26 x 1.5	Brass
BOE 36-2	M 36 x 2	M 26 x 1.5	Brass
BOE 38-1.5	M 38 x 1.5	M 26 x 1.5	Brass

Accessories

BOE ABLASS	Oil drain hose
BOE ABLASS 90	Oil drain hose

Spare parts

BOE DICHTSCHEIBE	Sealing washer for BOE drain screw
BOE KAPPE	Cap for drain screws