

BOE U

Oil drain screw with valve

Properties

Connection 1 UN/UNF external threads

Sealing form 1 Shape A


Connection 2 metric cylindrical outer thread

Design Drain valve

Scope of supply with copper ring and cap

Temp. min. -30 °C

Temp. max. 200 °C

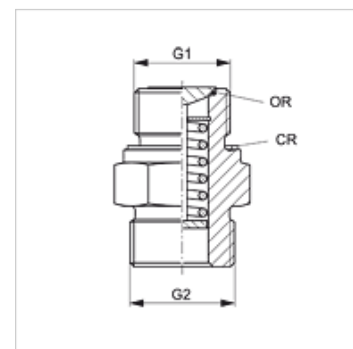

Note

Material for seal washer in protective cap: NBR.

Seal material on valve seat: FPM (Viton)

Description

The BOE oil drain screw is closed at rest (O-ring seal). When the oil drain hose is unscrewed, the valve is opened, allowing the oil to drain.

Item

Identification	G1	G2	Material
BOE U 1/2-20	1/2"-20 UNF	M 22 x 1.5	Steel
BOE U 5/8-18	5/8"-18 UNF	M 22 x 1.5	Steel
BOE U 3/4-16	3/4"-16 UNF	M 26 x 1.5	Steel
BOE U 7/8-14	7/8"-14 UNF	M 26 x 1.5	Steel
BOE U 1-12	1"-12 UNF	M 26 x 1.5	Brass
BOE U 1 1/8-12	1.1/8"-12 UNF	M 26 x 1.5	Brass
BOE U 1 1/2-12	1.1/2"-12 UNF	M 26 x 1.5	Brass
BOE U 1 1/16-12	1.1/16"-12 UN	M 26 x 1.5	Brass

Accessories

BOE ABLASS Oil drain hose

BOE ABLASS 90 Oil drain hose

Spare parts

BOE DICHTSCHEIBE Sealing washer for BOE drain screw

BOE KAPPE Cap for drain screws