


JG 05 (keg.)

Screw-in sockets

HANSA FLEX

Properties

| | |
|-----------------------|--|
| Application | Pneumatic, vacuum and food applications |
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 | Pipe sockets |
| Construction | straight |
| Design | Screw-in sockets |
| Colour | black |
| Media | Air fluid media inert gases, e.g., N ₂ /CO ₂ |
| Material | Acetal copolymer body; nitrile O-ring |

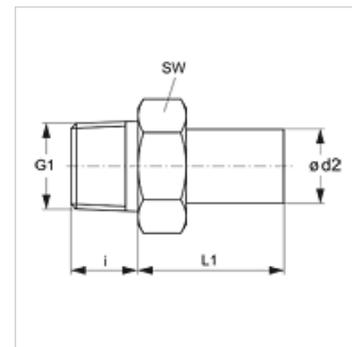

Item

| Identification | Ø d2 (mm) | G1 | i (mm) | L1 (mm) | AF (mm) |
|----------------|-----------|----------|--------|---------|---------|
| JG 05 04 01 E | 4 | R 1/8" K | 10 | 19 | 15 |
| JG 05 04 02 E | 4 | R 1/4" K | 11 | 19 | 17 |
| JG 05 05 01 E | 5 | R 1/8" K | 10 | 19 | 15 |
| JG 05 05 02 E | 5 | R 1/4" K | 11 | 19 | 17 |
| JG 05 06 01 E | 6 | R 1/8" K | 10 | 20 | 17 |
| JG 05 06 02 E | 6 | R 1/4" K | 11 | 20 | 17 |
| JG 05 08 01 E | 8 | R 1/8" K | 10 | 21 | 17 |
| JG 05 08 02 E | 8 | R 1/4" K | 11 | 21 | 17 |
| JG 05 08 03 E | 8 | R 3/8" K | 13 | 21 | 20 |
| JG 05 10 02 E | 10 | R 1/4" K | 11 | 24 | 20 |
| JG 05 10 03 E | 10 | R 3/8" K | 13 | 24 | 20 |
| JG 05 10 04 E | 10 | R 1/2" K | 16 | 24 | 22 |
| JG 05 12 03 E | 12 | R 3/8" K | 13 | 29 | 24 |
| JG 05 12 04 E | 12 | R 1/2" K | 16 | 29 | 24 |