
LSK IR M
Claw coupling (air)

Properties

Design	Claw inner thread coupling
Construction type	with safety double cam
Connection 1	BSP cylindrical internal threads
Connection 2	Claw coupling
Sealing form 2	Brass seal with rubber insert
Temp. min.	-40 °C
Temp. max.	95 °C
Material	Cast iron
Surface	electro galvanised

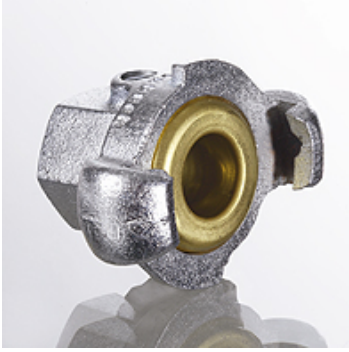

Note

A coupling with rubber seal must be used as the counter coupling.

Item

Identification	Connecting thread	Cog space (mm)	Operating pressure
LSK NW 13 IR M	G 1/2" -14	42	PN 10
LSK NW 20 IR M	G 3/4" -14	42	PN 10
LSK NW 25 IR M	G 1" -11	42	PN 10

Spare parts

LSK HOOS	Retaining screw for claw coupling
LSK MOOH	Brass sleeve for claw coupling
LSK SOOR	Hose ring for claw coupling

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.