

MENGENTEILER M

Flow divider

HANSA FLEX

Properties

Connection metric cylindrical inner thread

Mounting 2 x M8 internal thread

Installation position horizontal


Media HLP 30 - 46

Nominal flow 20 L/Min

Flow division ratio 50 : 50

Temp. min. -20 °C

Temp. max. 80 °C

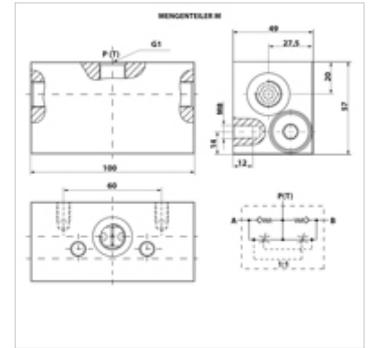

Item

Identification	Design	Operating pressure (bar)	G1	Weight (kg)
MENGENTEILER M 16	pressure-compensated	250,0	M 16 x 1.5	1,90
MENGENTEILER M 18	pressure-compensated	250,0	M 18 x 1.5	1,93