


SNK R

Hydraulic-type lubricating nipple

Properties

| | |
|---------------------------|---|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 | Lubricating nipple |
| Design | Hydraulic-type lubricating nipple |
| Construction | straight |
| Standard | DIN 71412 |
| Additional feature | Lubricating nipple head diameter 6,5 mm |
| Material | Steel |
| Surface | electro galvanised |

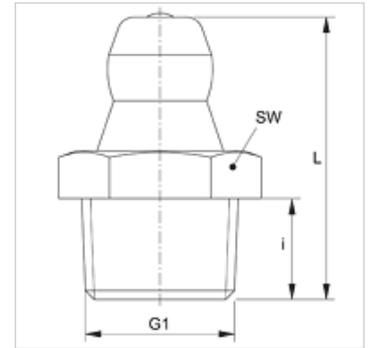

Item

| Identification | G1 | i (mm) | L (mm) | AF (mm) |
|----------------|----------|-----------|-----------|------------|
| SNK R1/8 | R 1/8" K | 5,5 | 15,0 | 11 |
| SNK R1/4 | R 1/4" K | 6,5 | 17,5 | 14 |