TR G VB T


Connector for Tecalan pipe

HANSA-FLEX

Properties

Special features	TÜV tested
Construction	straight
Design	Connector
Material	Steel
Surface	electro galvanised
Working pressure	Max. 10 bar



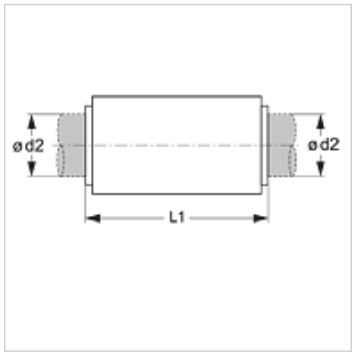

Item

Identification	Ø d2 (mm)	for pipe	L1 (mm)
TR 06 G VB T	6	6 x 1	35,6
TR 08 G VB T	8	8 x 1	37,6
TR 09 G VB T	9	9 x 1.5	47,0
TR 10 G VB T	10	10 x 1	44,1
TR 11 G VB T	11	11 x 1.5	48,0
TR 12 G VB T	12	12 x 1.5	51,1
TR 15 G VB T	15	15 x 1.5	61,5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.