3 BKHL TK


3-way ball valve in block design

HANSA-FLEX

Properties

Connection 1 - 3	metric cylindrical outer thread
Sealing form 1 - 3	24° inner cone
Construction	Compact construction
Bore	T shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft POM ball seal NBR O-ring
Surface	burnished



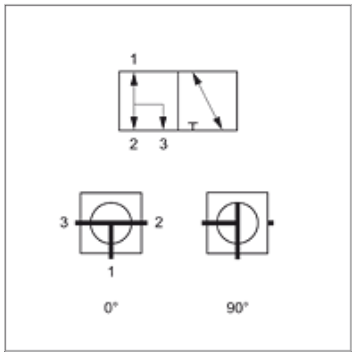

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Series	for external pipe Ø (mm)	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 BKHL 04 TK	4	L	6	M 14x1,5	negative (open)	5,0	PN 400	9	1,5
3 BKHL 06 TK	6	L	8	M 14x1,5	negative (open)	6,0	PN 400	9	1,5
3 BKHL 08 TK	8	L	10	M 16x1,5	negative (open)	7,0	PN 400	9	1,5
3 BKHL 10 TK	10	L	12	M 18x1,5	negative (open)	9,0	PN 400	9	1,5
3 BKHL 13 TK	12	L	15	M 22x1,5	negative (open)	11,5	PN 350	9	1,5
3 BKHL 16 TK	16	L	18	M 26x1,5	negative (open)	14,0	PN 350	12	1,5

DN = Nominal diameter, nominal width – Series: LL = Very light L = Light S = Heavy – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 BKHL TK VZ / 3 BKHS TK VZ	3-way ball valve in block design, electro galvanised

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.