


# 3 BKHL TK

3-way ball valve in block design

## Properties

<b>Connection 1 - 3</b>	metric cylindrical outer thread
<b>Sealing form 1 - 3</b>	24° inner cone
<b>Construction</b>	Compact construction
<b>Bore</b>	T shaped
<b>Contact travel</b>	0°; 90°
<b>Temp. min.</b>	-10 °C
<b>Temp. max.</b>	80 °C
<b>Material</b>	Steel housing, ball and operating shaft POM ball seal NBR O-ring
<b>Surface</b>	burnished

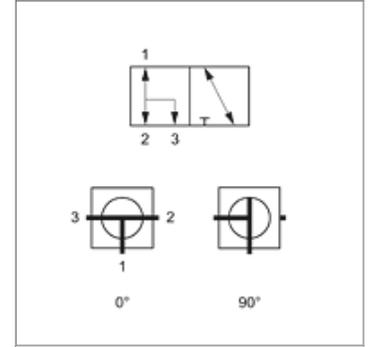

## Note

Please refer to the operating instructions for ball valves.  
Note the permissible pressure limits for the connecting elements.

## Item

Identification	DN*	Series	for external pipe Ø (mm)	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 BKHL 04 TK	4	L	6	M 14x1,5	negative (open)	5,0	PN 400	9	1,5
3 BKHL 06 TK	6	L	8	M 14x1,5	negative (open)	6,0	PN 400	9	1,5
3 BKHL 08 TK	8	L	10	M 16x1,5	negative (open)	7,0	PN 400	9	1,5
3 BKHL 10 TK	10	L	12	M 18x1,5	negative (open)	9,0	PN 400	9	1,5
3 BKHL 13 TK	12	L	15	M 22x1,5	negative (open)	11,5	PN 350	9	1,5
3 BKHL 16 TK	16	L	18	M 26x1,5	negative (open)	14,0	PN 350	12	1,5

DN = Nominal diameter, nominal width – Series: LL = Very light L = Light S = Heavy – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

## Product versions

3 BKHL TK VZ / 3 BKHS TK VZ 3-way ball valve in block design, electro galvanised

## Spare parts

<b>BK ANSCHLAG</b>	Stop washers for ball valve
<b>BK GEKR GRIFF SW</b>	Handle (offset) for ball valve