
3 BKR LK

3-way ball valve in block design

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	for screw-in pins with shapes A, B and if necessary E.
Construction	Compact construction
Bore	L shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft POM ball seal NBR O-ring
Surface	burnished



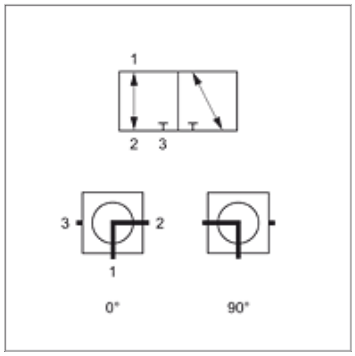

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 BKR 04 LK	4	G 1/8" -28	negative (open)	5,0	PN 400	9	1,5
3 BKR 06 LK	6	G 1/4" -19	negative (open)	6,0	PN 400	9	1,5
3 BKR 10 LK	10	G 3/8" -19	negative (open)	9,0	PN 400	9	1,5
3 BKR 13 LK	12	G 1/2" -14	negative (open)	11,5	PN 350	9	1,5
3 BKR 20 LK	19	G 3/4" -14	negative (open)	18,0	PN 350	14	1,5
3 BKR 25 LK	25	G 1" -11	negative (open)	22,0	PN 350	14	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 BKR LK VZ	3-way ball valve in block design, electro galvanised

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.