
3 BKR LK VZ

3-way ball valve in block design

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	for screw-in pins with shapes A, B and if necessary E.
Construction	Compact construction
Bore	L shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft
Surface	electro galvanised



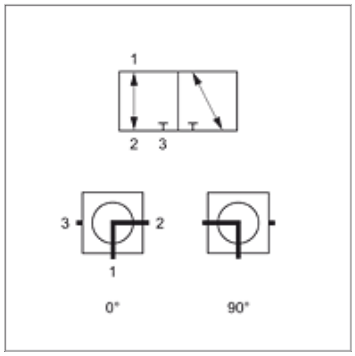

Note

Note the permissible pressure limits for the connecting elements.
Please refer to the operating instructions for ball valves.

Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 BKR 04 LK VZ	4	G 1/8" -28	negative (open)	5,0	PN 400	9	1,5
3 BKR 06 LK VZ	6	G 1/4" -19	negative (open)	6,0	PN 400	9	1,5
3 BKR 10 LK VZ	10	G 3/8" -19	negative (open)	9,0	PN 400	9	1,5
3 BKR 13 LK VZ	12	G 1/2" -14	negative (open)	11,5	PN 350	9	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 BKR LK	3-way ball valve in block design, burnished

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.