# 3 BKR ND L

3-way ball valve in low pressure design

## Properties

| | |
|---|---|
| **Connection 1 - 3** | BSP cylindrical internal threads |
| **Sealing form 1 - 3** | Shape A |
| **Bore** | L shaped |
| **Contact travel** | 0°; 90° |
| **Temp. range** | Water: 0 °C to +150 °C<br>Air: - 20 °C to + 150 °C |
| **Material** | Brass housing<br>Aluminium handle<br>Brass ball, hard chrome-plated<br>PTFE ball seal |
| **Surface** | nickel plated |



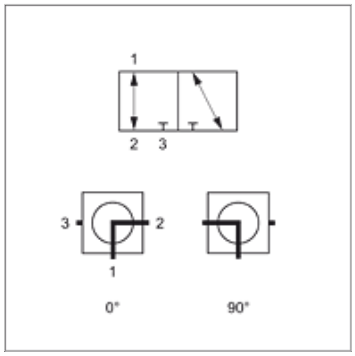


## Ordering information

Other pressure and temperature figures available on request.

### Item

| Identification | DN* | Connecting thread | Operating pressure (bar) |
|---|---|---|---|
| **3 BKR 06 ND L** | 6 | G 1/4" -19 | 25,0 |
| **3 BKR 10 ND L** | 10 | G 3/8" -19 | 25,0 |
| **3 BKR 13 ND L** | 12 | G 1/2" -14 | 25,0 |
| **3 BKR 20 ND L** | 19 | G 3/4" -14 | 25,0 |
| **3 BKR 25 ND L** | 25 | G 1" -11 | 25,0 |
| **3 BKR 32 ND L** | 31 | G 1.1/4" -11 | 25,0 |
| **3 BKR 40 ND L** | 38 | G 1.1/2" -11 | 25,0 |
| **3 BKR 50 ND L** | 50 | G 2" -11 | 25,0 |

DN = Nominal diameter, nominal width

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*