
3 BKR ND T

3-way ball valve in low pressure design

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	Shape A
Bore	T shaped
Contact travel	0°; 90°
Temp. range	Water: 0 °C to +150 °C Air: - 20 °C to + 150 °C
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal
Surface	nickel plated



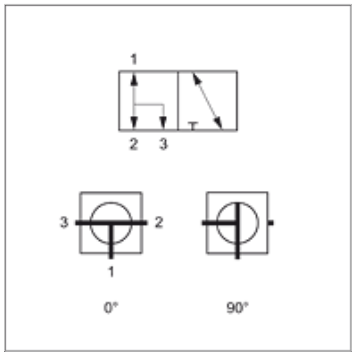

Ordering information

Other pressure and temperature figures available on request.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)
3 BKR 06 ND T	6	G 1/4" -19	25,0
3 BKR 10 ND T	10	G 3/8" -19	25,0
3 BKR 13 ND T	12	G 1/2" -14	25,0
3 BKR 20 ND T	19	G 3/4" -14	25,0
3 BKR 25 ND T	25	G 1" -11	25,0
3 BKR 32 ND T	31	G 1.1/4" -11	25,0
3 BKR 40 ND T	38	G 1.1/2" -11	25,0
3 BKR 50 ND T	51	G 2" -11	25,0

DN = Nominal diameter, nominal width

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.