


3 SKR TK

3-way ball valve, in forged design

HANSA FLEX

Properties

| | |
|---------------------------|---|
| Connection 1 - 3 | BSP cylindrical internal threads |
| Sealing form 1 - 3 | for screw-in pins with shapes A, B and if necessary E. |
| Design | 3-way ball valve, in forged design |
| Bore | T shaped |
| Contact travel | 0°; 90° |
| Temp. min. | -10 °C |
| Temp. max. | 80 °C |
| Material | Forged steel housing Steel ball and operating shaft POM ball seal NBR O-ring |
| Surface | burnished |

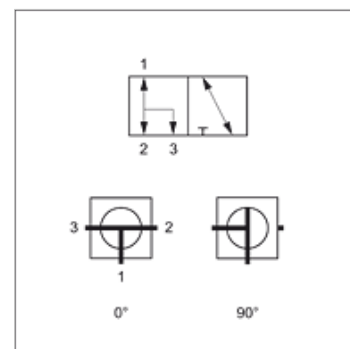

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

| Identification | DN* | Connecting thread | Overlap | LW (mm) | Operating pressure | AF (mm) | SF* |
|----------------|-----|-------------------|-----------------|------------|--------------------|------------|-----|
| 3 SKR 20 TK | 19 | G 3/4" -14 | negative (open) | 20 | PN 350 | 14 | 1,5 |
| 3 SKR 25 TK | 25 | G 1" -11 | negative (open) | 24 | PN 350 | 14 | 1,5 |

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 SKR TK VZ 3-way ball valve, in forged design, electro galvanised

Spare parts

| | |
|-------------------------|--------------------------------|
| BK ANSCHLAG | Stop washers for ball valve |
| BK GEKR GRIFF SW | Handle (offset) for ball valve |