


# 3 SKR TK

3-way ball valve, in forged design

**HANSA****FLEX**

## Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	for screw-in pins with shapes A, B and if necessary E.
Design	3-way ball valve, in forged design
Bore	T shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Forged steel housing Steel ball and operating shaft POM ball seal NBR O-ring
Surface	burnished

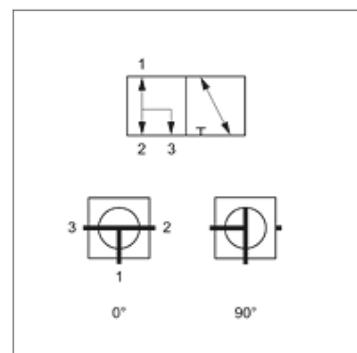

## Note

Please refer to the operating instructions for ball valves.

Note the permissible pressure limits for the connecting elements.

## Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
<b>3 SKR 20 TK</b>	19	G 3/4" -14	negative (open)	20	PN 350	14	1,5
<b>3 SKR 25 TK</b>	25	G 1" -11	negative (open)	24	PN 350	14	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure – PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

## Product versions

**3 SKR TK VZ** 3-way ball valve, in forged design, electro galvanised

## Spare parts

<b>BK ANSCHLAG</b>	Stop washers for ball valve
<b>BK GEKR GRIFF SW</b>	Handle (offset) for ball valve