


3 SKR TK VZ

3-way ball valve, in forged design

HANSA**FLEX**

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	for screw-in pins with shapes A, B and if necessary E.
Design	3-way ball valve, in forged design
Bore	T shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Forged steel housing Steel ball and operating shaft POM ball seal NBR O-ring
Surface	electro galvanised

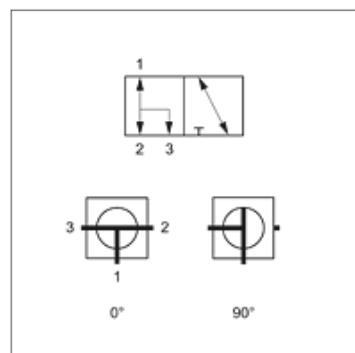

Note

Please refer to the operating instructions for ball valves.

Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 SKR 20 TK VZ	19	G 3/4" -14	negative (open)	20	PN 350	14	1,5
3 SKR 25 TK VZ	25	G 1" -11	negative (open)	24	PN 350	14	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure – PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 SKR TK 3-way ball valve, in forged design, burnished

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve