
3 SKR TK VZ

3-way ball valve, in forged design

Properties

Connection 1 - 3	BSP cylindrical internal threads
Sealing form 1 - 3	for screw-in pins with shapes A, B and if necessary E.
Design	3-way ball valve, in forged design
Bore	T shaped
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Forged steel housing Steel ball and operating shaft POM ball seal NBR O-ring
Surface	electro galvanised



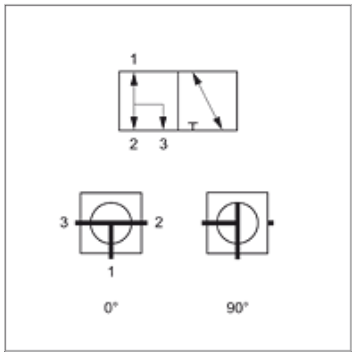

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
3 SKR 20 TK VZ	19	G 3/4" -14	negative (open)	20	PN 350	14	1,5
3 SKR 25 TK VZ	25	G 1" -11	negative (open)	24	PN 350	14	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

3 SKR TK	3-way ball valve, in forged design, burnished

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.