4 BKR L


4-way ball valve

HANSA-FLEX

Properties

Connection 1 - 4	BSP cylindrical internal threads
Sealing form 1 - 4	for screw-in pins with shapes A, B and if necessary E
Bore	L shaped and strain relief hole
Contact travel	0°; 45°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft POM ball seal NBR O-ring
Surface	burnished



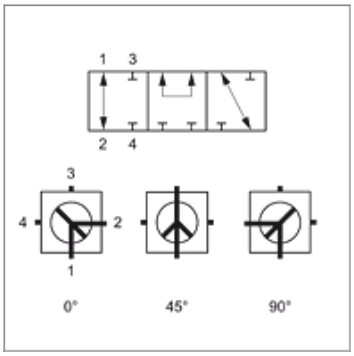

Note

Please refer to the operating instructions for ball valves.

Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Connecting thread	Overlap	LW (mm)	Operating pressure	AF (mm)	SF*
4 BKR 04 L	4	G 1/8" -28	negative (open)	5,0	PN 500	12	1,5
4 BKR 06 L	6	G 1/4" -19	negative (open)	6,0	PN 500	12	1,5
4 BKR 10 L	10	G 3/8" -19	negative (open)	9,0	PN 500	14	1,5
4 BKR 13 L	12	G 1/2" -14	negative (open)	12,5	PN 400	14	1,5
4 BKR 20 L	19	G 3/4" -14	negative (open)	19,0	PN 400	17	1,5
4 BKR 25 L	25	G 1" -11	negative (open)	24,0	PN 350	17	1,5
4 BKR 32 L	31	G 1.1/4" -11	negative (open)	24,0	PN 350	17	1,5
4 BKR 40 L	38	G 1.1/2" -11	negative (open)	36,0	PN 63	22	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Spare parts

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.