
BKR HR ND

2-way ball valve in low pressure design

Properties

Connection 1	BSP cylindrical internal threads
Connection 2	BSP cylindrical external threads
Contact travel	0°; 90°
Temp. range	Air: - 20 °C to + 150 °C Water: 0 °C to +150 °C
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal
Surface	nickel plated



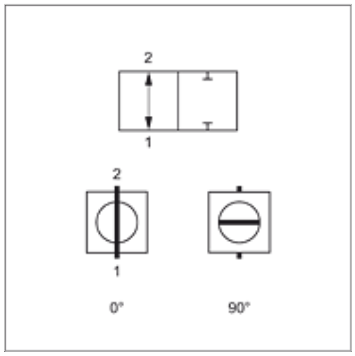

Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

Ordering information

Other pressure and temperature figures available on request.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)
BKR 06 HR ND	6	G 1/4" -19	50,0
BKR 10 HR ND	10	G 3/8" -19	50,0
BKR 13 HR ND	12	G 1/2" -14	50,0
BKR 20 HR ND	19	G 3/4" -14	40,0
BKR 25 HR ND	25	G 1" -11	40,0
BKR 32 HR ND	31	G 1.1/4" -11	30,0
BKR 40 HR ND	38	G 1.1/2" -11	30,0
BKR 50 HR ND	51	G 2" -11	25,0

DN = Nominal diameter, nominal width – SF = Safety factor – AF = Width across flats – BD = Working pressure

Spare parts

ND GRIFF	Handle for ND ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.