
BKR ND

2-way ball valve in low pressure design

Properties

Connection 1 + 2	BSP cylindrical internal threads
Contact travel	0°; 90°
Temp. range	Air: - 20 °C to + 150 °C Water: 0 °C to +150 °C
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal
Surface	nickel plated



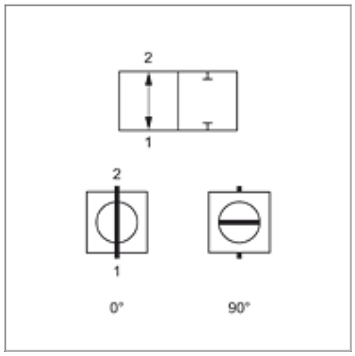

Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

Ordering information

Other pressure and temperature figures available on request.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)
BKR 06 ND	6	G 1/4" -19	50,0
BKR 10 ND	10	G 3/8" -19	50,0
BKR 13 ND	12	G 1/2" -14	50,0
BKR 20 ND	19	G 3/4" -14	40,0
BKR 25 ND	25	G 1" -11	40,0
BKR 32 ND	31	G 1.1/4" -11	30,0
BKR 40 ND	38	G 1.1/2" -11	30,0
BKR 50 ND	51	G 2" -11	25,0
BKR 65 ND	65	G 2.1/2" -11	18,0
BKR 75 ND	76	G 3" -11	16,0
BKR 100 ND	100	G 4" -11	14,0

DN = Nominal diameter, nominal width – BD = Working pressure

Spare parts

ND GRIFF	Handle for ND ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.