


Properties

| | |
|-------------------------|---|
| Construction | Compact type with T- handle |
| Connection 1 + 2 | BSP cylindrical internal threads |
| Contact travel | 0°; 90° |
| Temp. range | Air: - 20 °C to + 150 °C Water: 0 °C to +150 °C |
| Material | Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal |
| Surface | nickel plated |

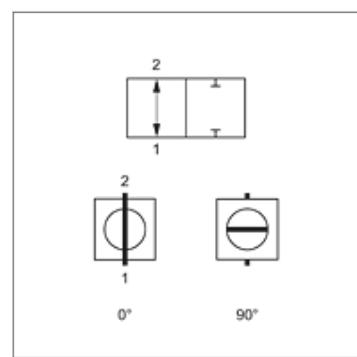

Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

Ordering information

Other pressure and temperature figures available on request.

| Item | Identification | DN* | Connecting thread | Operating pressure (bar) |
|--------------------|----------------|-----|-------------------|-----------------------------|
| BKR 06 ND K | | 6 | G 1/4" -19 | 50,0 |
| BKR 10 ND K | | 10 | G 3/8" -19 | 50,0 |
| BKR 13 ND K | | 12 | G 1/2" -14 | 50,0 |
| BKR 20 ND K | | 19 | G 3/4" -14 | 40,0 |
| BKR 25 ND K | | 25 | G 1" -11 | 40,0 |

DN = Nominal diameter, nominal width – BD = Working pressure