
BKR ND ROV

2-way ball valve in low pressure design

Properties

Connection 1 + 2	BSP cylindrical internal threads
Sealing form 1 + 2	for screw-in pins with shapes A, B and if necessary E
Contact travel	0°; 90°
Temp. range	Water: 0 °C to +130 °C Air: - 20 °C to +130 °C
Material	Brass housing Aluminium handle Brass ball, hard chrome-plated PTFE ball seal
Surface	nickel plated



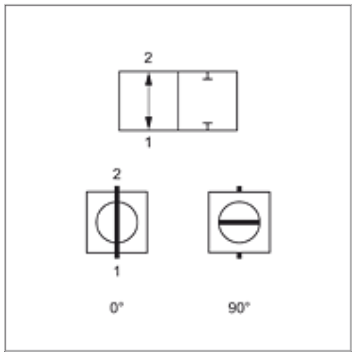

Note

The pressure figures are applicable for temperatures from 0 °C to +25 °C; at higher temperatures, pressure reductions must be taken into account.

Description

With longer screw-in thread for pipe fittings to DIN 2353

Ordering information

Other pressure and temperature figures available on request.

Item

Identification	DN*	Connecting thread	Operating pressure (bar)
BKR 06 ND ROV	6	G 1/4" -19	64,0
BKR 10 ND ROV	10	G 3/8" -19	64,0
BKR 13 ND ROV	12	G 1/2" -14	50,0
BKR 20 ND ROV	19	G 3/4" -14	40,0
BKR 25 ND ROV	25	G 1" -11	40,0
BKR 32 ND ROV	31	G 1.1/4" -11	30,0
BKR 40 ND ROV	38	G 1.1/2" -11	30,0
BKR 50 ND ROV	51	G 2" -11	25,0

DN = Nominal diameter, nominal width

Spare parts

ND GRIFF	Handle for ND ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.