
BKR VA

2-way ball valve in block design

Properties

Connection 1 + 2	BSP cylindrical internal threads
Sealing form 1 + 2	for screw-in pins with shapes A, B and if necessary E
Contact travel	0°; 90°
Temp. min.	-20 °C
Temp. max.	60 °C
Material	Stainless steel housing, ball and operating shaft POM ball seal NBR O-ring



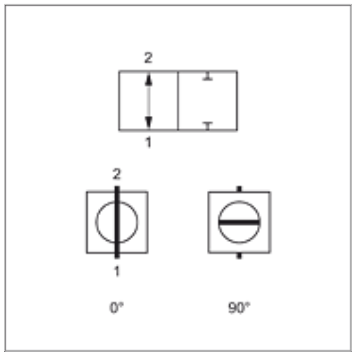

Note

Note the permissible pressure limits for the connecting elements.
Please refer to the operating instructions for ball valves.

Item

Identification	DN*	Connecting thread	LW (mm)	Operating pressure	AF (mm)	SF*
BKR 06 VA	6	G 1/4" -19	6	PN 400	9	1,5
BKR 10 VA	10	G 3/8" -19	10	PN 400	9	1,5
BKR 13 VA	12	G 1/2" -14	13	PN 400	9	1,5
BKR 20 VA	19	G 3/4" -14	20	PN 400	14	1,5
BKR 25 VA	25	G 1" -11	24	PN 400	14	1,5
BKR 32 VA	31	G 1.1/4" -11	32	PN 400	17	1,5
BKR 40 VA	38	G 1.1/2" -11	38	PN 400	17	1,5

DN = Nominal diameter, nominal width – PN = Nominal pressure PB = Max. operating pressure – LW = Clearance – AF = Width across flats – SF = Safety factor

Product versions

BKR	2-way ball valve in block design, burnished
BKR VZ	2-way ball valve in block design, electro galvanised

Accessories

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.