


### Properties

Connection 1 + 2	BSP cylindrical internal threads
Sealing form 1 + 2	for screw-in pins with shapes A, B and if necessary E
Contact travel	0°; 90°
Temp. min.	-20 °C
Temp. max.	60 °C
Material	Stainless steel housing, ball and operating shaft POM ball seal NBR O-ring

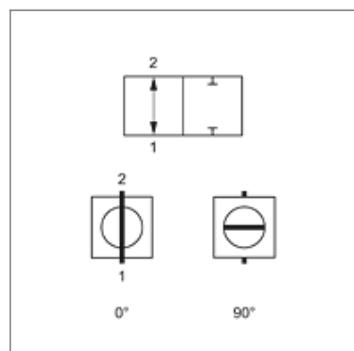

### Note

Note the permissible pressure limits for the connecting elements.

Please refer to the operating instructions for ball valves.

### Item

Identification	DN*	Connecting thread	LW (mm)	Operating pressure	AF (mm)	SF*
<b>BKR 06 VA</b>	6	G 1/4" -19	6	PN 400	9	1,5
<b>BKR 10 VA</b>	10	G 3/8" -19	10	PN 400	9	1,5
<b>BKR 13 VA</b>	12	G 1/2" -14	13	PN 400	9	1,5
<b>BKR 20 VA</b>	19	G 3/4" -14	20	PN 400	14	1,5
<b>BKR 25 VA</b>	25	G 1" -11	24	PN 400	14	1,5
<b>BKR 32 VA</b>	31	G 1 1/4" -11	32	PN 400	17	1,5
<b>BKR 40 VA</b>	38	G 1 1/2" -11	38	PN 400	17	1,5

DN = Nominal diameter, nominal width – PN = Nominal pressure PB = Max. operating pressure – LW = Clearance – AF = Width across flats – SF = Safety factor

### Product versions

**BKR** 2-way ball valve in block design, burnished

**BKR VZ** 2-way ball valve in block design, electro galvanised

### Accessories

**BK ANSCHLAG** Stop washers for ball valve

**BK GEKR GRIFF SW** Handle (offset) for ball valve