
BKR VZ

2-way ball valve in block design

Properties

Connection 1 + 2	BSP cylindrical internal threads
Sealing form 1 + 2	for screw-in pins with shapes A, B and if necessary E
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Steel housing, ball and operating shaft Polyamide ball seal NBR O-ring
Surface	electro galvanised



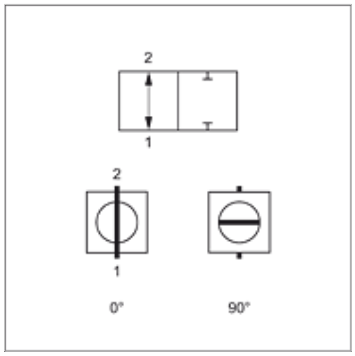

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Connecting thread	LW (mm)	Operating pressure	AF (mm)	SF*
BKR 04 VZ	4	G 1/8" -28	5	PN 500	9	1,5
BKR 06 VZ	6	G 1/4" -19	6	PN 500	9	1,5
BKR 10 VZ	10	G 3/8" -19	10	PN 500	9	1,5
BKR 13 VZ	12	G 1/2" -14	13	PN 500	9	1,5
BKR 20 VZ	19	G 3/4" -14	20	PN 400	14	1,5
BKR 25 VZ	25	G 1" -11	24	PN 350	14	1,5
BKR 32 VZ	31	G 1.1/4" -11	24	PN 350	14	1,5
BKR 40 VZ	38	G 1.1/2" -11	24	PN 350	14	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Product versions

BKR	2-way ball valve in block design, burnished
BKR VA	2-way ball valve in block design, Stainless steel housing, ball and operating shaft

Accessories

BK ANSCHLAG	Stop washers for ball valve
BK GEKR GRIFF SW	Handle (offset) for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.