SK SF / SK SF6


2-way ball valve, in forged design

HANSA-FLEX

Properties

Connection 1 + 2	SAE flange
Sealing form 1 + 2	flat seal with SF O-ring
Contact travel	0°; 90°
Temp. min.	-10 °C
Temp. max.	80 °C
Material	Forged steel housing Steel ball and operating shaft POM ball seal NBR O-ring
Surface	burnished



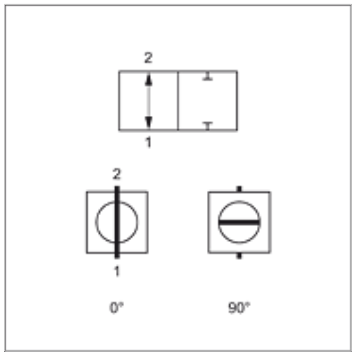

Note

Please refer to the operating instructions for ball valves.
Note the permissible pressure limits for the connecting elements.

Item

Identification	DN*	Pressure series	Flange size	LW (mm)	Pressure PN	AF (mm)	SF*
SK SF 32	31	3000 PSI	1.1/4"	32,0	250 bar	17	1,5
SK SF 40	38	3000 PSI	1.1/2"	38,0	200 bar	17	1,5
SK SF 50	51	3000 PSI	2"	47,5	200 bar	17	1,5
SK SF6 32	31	6000 PSI	1.1/4"	32,0	400 bar	17	1,5
SK SF6 40	38	6000 PSI	1.1/2"	38,0	400 bar	17	1,5
SK SF6 50	51	6000 PSI	2"	47,5	400 bar	17	1,5

DN = Nominal diameter, nominal width – LW = Clearance – PN = Nominal pressure PB = Max. operating pressure – AF = Width across flats – SF = Safety factor

Spare parts

BK GEKR GRIFF SW	Handle (offset) for ball valve
BK ANSCHLAG	Stop washers for ball valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.