


Properties

Application primarily in the construction machinery sector

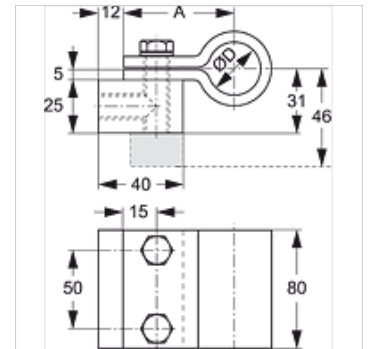

Note

Installation: The retaining piece is welded or screwed upright or horizontally flat onto the machine body. The two halves of the clamp are screwed onto the retaining piece.

Description

The steel pipe clamp is used for (subsequent) installation of hydraulic pipes and hose lines.

Additional information

The robust construction of the clamp dampens impacts and vibrations. It can be supplemented with an elastomer insert (HSRS EE).

Item

| Identification | A (mm) | Ø D (mm) |
|----------------|-----------|-------------|
| HSRS 25 | 52,5 | 25 |
| HSRS 30 | 55,0 | 30 |
| HSRS 35 | 57,5 | 35 |
| HSRS 38 | 59,0 | 38 |
| HSRS 42 | 61,0 | 42 |
| HSRS 50 | 65,0 | 50 |

Accessories

HSRS EE Elastomer insert for steel pipe clamp