


### Properties

**Application** primarily in the construction machinery sector

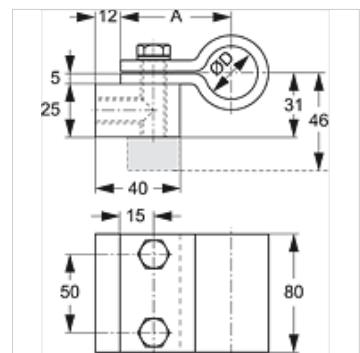

### Note

Installation: The retaining piece is welded or screwed upright or horizontally flat onto the machine body. The two halves of the clamp are screwed onto the retaining piece.

### Description

The steel pipe clamp is used for (subsequent) installation of hydraulic pipes and hose lines.

### Additional information

The robust construction of the clamp dampens impacts and vibrations. It can be supplemented with an elastomer insert (HSRS EE).

### Item

Identification	A (mm)	Ø D (mm)
HSRS 25	52,5	25
HSRS 30	55,0	30
HSRS 35	57,5	35
HSRS 38	59,0	38
HSRS 42	61,0	42
HSRS 50	65,0	50

### Accessories

**HSRS EE** Elastomer insert for steel pipe clamp