


SRS 1-5 D PP

Pipe clamp, double pipes

Properties

| | |
|--------------------------|--------------------------|
| Design | Double pipe clamp |
| Construction type | Inside of clamp with web |
| Standard | DIN 3015-3 |
| Temp. min. | -30 °C |
| Temp. max. | 90 °C |
| Material | Polypropylene |

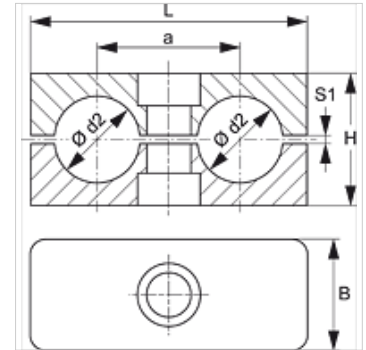

Note

The use of clamps with a smooth inner surface is recommended for retaining hoses and cables. No pretension is applied when fitting and the block height H is reduced to the gap width S1.

Description

Webs in the inner surface of the clamps dampen impacts and vibrations and absorb forces along the pipe axis. A gap between the two halves pretensions the pipe.

Ordering information

1 piece = 2 halves of clamp

Item

| Identification | Clamp size | External pipe Ø d2 (mm) | External pipe Ø d2 | a (mm) | B (mm) | H (mm) | L (mm) | S1 (mm) |
|----------------|------------|-------------------------|--------------------|--------|--------|--------|--------|---------|
| SRS 106 D PP | 1 | 6,0 | - | 20 | 30 | 27 | 36 | 1,0 |
| SRS 106.4 D PP | 1 | 6,4 | 1/4" | 20 | 30 | 27 | 36 | 1,0 |
| SRS 108 D PP | 1 | 8,0 | 5/16" | 20 | 30 | 27 | 36 | 1,0 |
| SRS 109.5 D PP | 1 | 9,5 | 3/8" | 20 | 30 | 27 | 36 | 1,0 |
| SRS 110 D PP | 1 | 10,0 | - | 20 | 30 | 27 | 36 | 1,0 |
| SRS 112 D PP | 1 | 12,0 | - | 20 | 30 | 27 | 36 | 1,0 |
| SRS 212.7 D PP | 2 | 12,7 | 1/2" | 29 | 30 | 26 | 53 | 1,2 |
| SRS 213.5 D PP | 2 | 13,5 | - | 29 | 30 | 26 | 53 | 1,2 |
| SRS 214 D PP | 2 | 14,0 | - | 29 | 30 | 26 | 53 | 1,2 |
| SRS 215 D PP | 2 | 15,0 | - | 29 | 30 | 26 | 53 | 1,2 |
| SRS 216 D PP | 2 | 16,0 | 5/8" | 29 | 30 | 26 | 53 | 1,2 |
| SRS 217.2 D PP | 2 | 17,2 | - | 29 | 30 | 26 | 53 | 1,2 |
| SRS 218 D PP | 2 | 18,0 | - | 29 | 30 | 26 | 53 | 1,2 |
| SRS 319 D PP | 3 | 19,0 | 3/4" | 36 | 30 | 37 | 67 | 1,6 |
| SRS 320 D PP | 3 | 20,0 | - | 36 | 30 | 37 | 67 | 1,6 |
| SRS 321.3 D PP | 3 | 21,3 | - | 36 | 30 | 37 | 67 | 1,6 |
| SRS 322 D PP | 3 | 22,0 | - | 36 | 30 | 37 | 67 | 1,6 |
| SRS 325 D PP | 3 | 25,0 | 1" | 36 | 30 | 37 | 67 | 1,6 |
| SRS 426.9 D PP | 4 | 26,9 | - | 45 | 30 | 42 | 82 | 2,0 |
| SRS 428 D PP | 4 | 28,0 | - | 45 | 30 | 42 | 82 | 2,0 |
| SRS 430 D PP | 4 | 30,0 | - | 45 | 30 | 42 | 82 | 2,0 |
| SRS 532 D PP | 5 | 32,0 | 1.1/4" | 56 | 30 | 54 | 106 | 2,0 |
| SRS 533.7 D PP | 5 | 33,7 | - | 56 | 30 | 54 | 106 | 2,0 |
| SRS 535 D PP | 5 | 35,0 | - | 56 | 30 | 54 | 106 | 2,0 |
| SRS 538 D PP | 5 | 38,0 | 1.1/2" | 56 | 30 | 54 | 106 | 2,0 |
| SRS 542 D PP | 5 | 42,0 | - | 56 | 30 | 54 | 106 | 2,0 |

Product versions

| | |
|----------------|----------------------------------------------------|
| SRS 1-5 D PP G | Pipe clamp, double pipes, Inside of clamp, smooth |
| SRS 1-5 D PA | Pipe clamp, double pipes, Inside of clamp with web |
| SRS 1-5 D VG | Pipe clamp, double pipes, Inside of clamp, smooth |

Additional element for following products

| | |
|-----|--------------------------------------|
| B A | Configuration of group B composition |
|-----|--------------------------------------|



