



SRS 1-6 D SP

Double welded on base plate, single pipe clamp

HANSA**FLEX**

Properties

| | |
|----------|------------------------|
| Design | for single pipe clamps |
| Series | light |
| Standard | DIN 3015-1 |
| Material | Steel |
| Surface | phosphate treated |

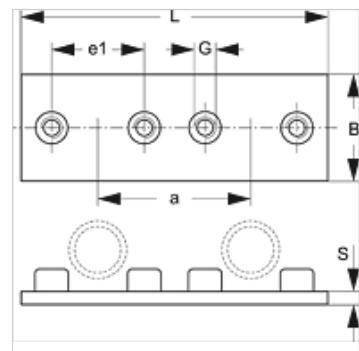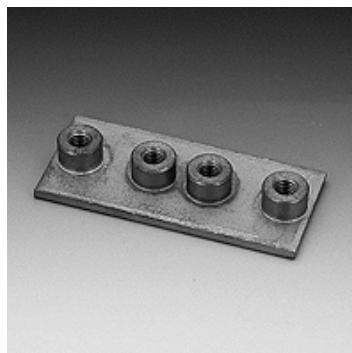

Item

| Identification | Clamp size | a (mm) | B (mm) | e1 (mm) | G | L (mm) | S (mm) |
|----------------|------------|-----------|-----------|------------|-----|-----------|-----------|
| SRS D SP 1 A | 1 | 35 | 30 | 20 | M 6 | 69 | 3 |
| SRS D SP 2 | 2 | 43 | 30 | 26 | M 6 | 86 | 3 |
| SRS D SP 3 | 3 | 52 | 30 | 33 | M 6 | 104 | 3 |
| SRS D SP 4 | 4 | 60 | 30 | 40 | M 6 | 117 | 3 |
| SRS D SP 5 | 5 | 75 | 30 | 52 | M 6 | 145 | 3 |
| SRS D SP 6 | 6 | 90 | 30 | 66 | M 6 | 176 | 3 |

Product versions

SRS 1-6 D SP VZ Double cover plate, single pipe clamp, electro galvanised

Additional element for following products

| | |
|-------|------------------------------|
| A 1-6 | Configuration of group A 1-6 |
|-------|------------------------------|