


SRS 1-6 PA

Pipe clamp, light series

Properties

| | |
|-------------------|--------------------------|
| Construction type | Inside of clamp with web |
| Series | light |
| Standard | DIN 3015-1 |
| Temp. min. | -40 °C |
| Temp. max. | 120 °C |
| Material | Polyamide 6 |

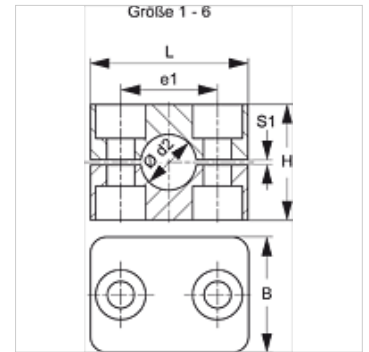

Note

The use of clamps with a smooth inner surface is recommended for retaining hoses and cables. No pretension is applied when fitting and the block height H is reduced to the gap width S1.

Description

Webs in the inner surface of the clamps dampen impacts and vibrations and absorb forces along the pipe axis. A gap between the two halves pretensions the pipe.

Ordering information

1 piece = 2 halves of clamp

Item

| Identification | External pipe Ø d2 (mm) | External pipe Ø d2 | Clamp size | e1 (mm) | H (mm) | L (mm) | S1 (mm) |
|----------------|-------------------------|--------------------|------------|---------|--------|--------|---------|
| SRS 106 A PA | 6,0 | - | 1 | 20 | 27 | 34 | 0,6 |
| SRS 106.4 A PA | 6,4 | 1/4" | 1 | 20 | 27 | 34 | 0,6 |
| SRS 108 A PA | 8,0 | 5/16" | 1 | 20 | 27 | 34 | 0,6 |
| SRS 109.5 A PA | 9,5 | 3/8" | 1 | 20 | 27 | 34 | 0,6 |
| SRS 110 A PA | 10,0 | - | 1 | 20 | 27 | 34 | 0,6 |
| SRS 112 A PA | 12,0 | - | 1 | 20 | 27 | 34 | 0,6 |
| SRS 0212.7 PA | 12,7 | 1/2" | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0213.5 PA | 13,5 | - | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0214 PA | 14,0 | - | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0215 PA | 15,0 | - | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0216 PA | 16,0 | 5/8" | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0217.2 PA | 17,2 | - | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0218 PA | 18,0 | - | 2 | 26 | 33 | 40 | 0,8 |
| SRS 0319 PA | 19,0 | 3/4" | 3 | 33 | 35 | 48 | 1,0 |
| SRS 0320 PA | 20,0 | - | 3 | 33 | 35 | 48 | 1,0 |
| SRS 0321.3 PA | 21,3 | - | 3 | 33 | 35 | 48 | 1,0 |
| SRS 0322 PA | 22,0 | - | 3 | 33 | 35 | 48 | 1,0 |
| SRS 0325 PA | 25,0 | 1" | 3 | 33 | 35 | 48 | 1,0 |
| SRS 0426.9 PA | 26,9 | - | 4 | 40 | 42 | 57 | 1,2 |
| SRS 0428 PA | 28,0 | - | 4 | 40 | 42 | 57 | 1,2 |
| SRS 0430 PA | 30,0 | - | 4 | 40 | 42 | 57 | 1,2 |
| SRS 0532 PA | 32,0 | 1.1/4" | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0533.7 PA | 33,7 | - | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0535 PA | 35,0 | - | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0538 PA | 38,0 | 1.1/2" | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0540 PA | 40,0 | - | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0542 PA | 42,0 | - | 5 | 52 | 58 | 70 | 1,2 |
| SRS 0644.5 PA | 44,5 | 1.3/4" | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0645 PA | 45,0 | - | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0648 PA | 48,0 | - | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0650 PA | 50,0 | - | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0650.8 PA | 50,8 | 2" | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0652 PA | 52,0 | - | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0655 PA | 55,0 | - | 6 | 66 | 66 | 86 | 1,2 |
| SRS 0657 PA | 57,0 | 2.1/4" | 6 | 66 | 66 | 86 | 1,2 |



Product versions

| | |
|---------------------|--|
| SRS 1-6 PA G | Pipe clamp, light series, Inside of clamp, smooth |
| SRS 1-6 PP | Pipe clamp, light series, Inside of clamp with web |
| SRS 1-6 PP G | Pipe clamp, light series, Inside of clamp, smooth |
| SRS 1-6 VG | Pipe clamp, light series, Inside of clamp, smooth |
| SRS 1-6 AL | Pipe clamp, light series, Inside of clamp with web |