


# SRS 1-6 PA

Pipe clamp, light series

## Properties

|                   |                          |
|-------------------|--------------------------|
| Construction type | Inside of clamp with web |
| Series            | light                    |
| Standard          | DIN 3015-1               |
| Temp. min.        | -40 °C                   |
| Temp. max.        | 120 °C                   |
| Material          | Polyamide 6              |

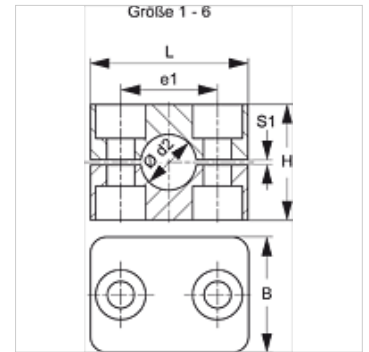

## Note

The use of clamps with a smooth inner surface is recommended for retaining hoses and cables. No pretension is applied when fitting and the block height H is reduced to the gap width S1.

## Description

Webs in the inner surface of the clamps dampen impacts and vibrations and absorb forces along the pipe axis. A gap between the two halves pretensions the pipe.

## Ordering information

1 piece = 2 halves of clamp

## Item

| Identification | External pipe Ø d2 (mm) | External pipe Ø d2 | Clamp size | e1 (mm) | H (mm) | L (mm) | S1 (mm) |
|----------------|-------------------------|--------------------|------------|---------|--------|--------|---------|
| SRS 106 A PA   | 6,0                     | -                  | 1          | 20      | 27     | 34     | 0,6     |
| SRS 106.4 A PA | 6,4                     | 1/4"               | 1          | 20      | 27     | 34     | 0,6     |
| SRS 108 A PA   | 8,0                     | 5/16"              | 1          | 20      | 27     | 34     | 0,6     |
| SRS 109.5 A PA | 9,5                     | 3/8"               | 1          | 20      | 27     | 34     | 0,6     |
| SRS 110 A PA   | 10,0                    | -                  | 1          | 20      | 27     | 34     | 0,6     |
| SRS 112 A PA   | 12,0                    | -                  | 1          | 20      | 27     | 34     | 0,6     |
| SRS 0212.7 PA  | 12,7                    | 1/2"               | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0213.5 PA  | 13,5                    | -                  | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0214 PA    | 14,0                    | -                  | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0215 PA    | 15,0                    | -                  | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0216 PA    | 16,0                    | 5/8"               | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0217.2 PA  | 17,2                    | -                  | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0218 PA    | 18,0                    | -                  | 2          | 26      | 33     | 40     | 0,8     |
| SRS 0319 PA    | 19,0                    | 3/4"               | 3          | 33      | 35     | 48     | 1,0     |
| SRS 0320 PA    | 20,0                    | -                  | 3          | 33      | 35     | 48     | 1,0     |
| SRS 0321.3 PA  | 21,3                    | -                  | 3          | 33      | 35     | 48     | 1,0     |
| SRS 0322 PA    | 22,0                    | -                  | 3          | 33      | 35     | 48     | 1,0     |
| SRS 0325 PA    | 25,0                    | 1"                 | 3          | 33      | 35     | 48     | 1,0     |
| SRS 0426.9 PA  | 26,9                    | -                  | 4          | 40      | 42     | 57     | 1,2     |
| SRS 0428 PA    | 28,0                    | -                  | 4          | 40      | 42     | 57     | 1,2     |
| SRS 0430 PA    | 30,0                    | -                  | 4          | 40      | 42     | 57     | 1,2     |
| SRS 0532 PA    | 32,0                    | 1.1/4"             | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0533.7 PA  | 33,7                    | -                  | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0535 PA    | 35,0                    | -                  | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0538 PA    | 38,0                    | 1.1/2"             | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0540 PA    | 40,0                    | -                  | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0542 PA    | 42,0                    | -                  | 5          | 52      | 58     | 70     | 1,2     |
| SRS 0644.5 PA  | 44,5                    | 1.3/4"             | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0645 PA    | 45,0                    | -                  | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0648 PA    | 48,0                    | -                  | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0650 PA    | 50,0                    | -                  | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0650.8 PA  | 50,8                    | 2"                 | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0652 PA    | 52,0                    | -                  | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0655 PA    | 55,0                    | -                  | 6          | 66      | 66     | 86     | 1,2     |
| SRS 0657 PA    | 57,0                    | 2.1/4"             | 6          | 66      | 66     | 86     | 1,2     |



## Product versions

|                     |  |
|---------------------|--|
| <b>SRS 1-6 PA G</b> | Pipe clamp, light series, Inside of clamp, smooth  |
| <b>SRS 1-6 PP</b>   | Pipe clamp, light series, Inside of clamp with web |
| <b>SRS 1-6 PP G</b> | Pipe clamp, light series, Inside of clamp, smooth  |
| <b>SRS 1-6 VG</b>   | Pipe clamp, light series, Inside of clamp, smooth  |
| <b>SRS 1-6 AL</b>   | Pipe clamp, light series, Inside of clamp with web |