


SRS 1-6 SP L

Welded on and screw-on base plate, long

HANSA**FLEX**

Properties

| | |
|----------|------------------------|
| Design | for single pipe clamps |
| Series | light |
| Standard | DIN 3015-1 |
| Material | Steel |
| Surface | phosphate treated |

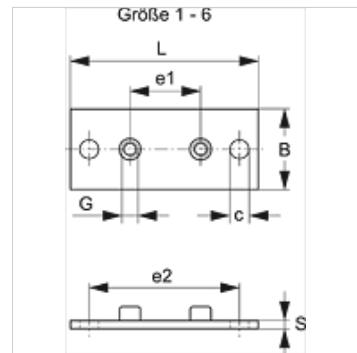

Item

| Identification | Clamp size | B (mm) | c (mm) | e1 (mm) | e2 (mm) | G | L (mm) | S (mm) |
|----------------|------------|-----------|-----------|------------|------------|-----|-----------|-----------|
| SRS SP L 1 A | 1 | 30 | 7 | 20 | 50 | M 6 | 64 | 3 |
| SRS SP L 2 | 2 | 30 | 7 | 26 | 56 | M 6 | 70 | 3 |
| SRS SP L 3 | 3 | 30 | 7 | 33 | 64 | M 6 | 78 | 3 |
| SRS SP L 4 | 4 | 30 | 7 | 40 | 73 | M 6 | 87 | 3 |
| SRS SP L 5 | 5 | 30 | 7 | 52 | 86 | M 6 | 100 | 3 |
| SRS SP L 6 | 6 | 30 | 7 | 66 | 100 | M 6 | 116 | 3 |

Product versions

SRS 1-6 SP L V4 Welded on and screw-on base plate, long, Stainless steel 1.4571

SRS 1-6 SP L VZ Welded on and screw-on base plate, long, electro galvanised

Additional element for following products

A 1-6 Configuration of group A 1-6