# SRS 30-100 VG


Pipe clamp, heavy series

HANSA-FLEX

## Properties

| | |
|---|---|
| **Design** | Single pipe clamp |
| **Construction type** | Inside of clamp with web |
| **Series** | heavy |
| **Standard** | DIN 3015-2 |
| **Temp. min.** | -50 °C |
| **Temp. max.** | 120 °C |
| **Material** | Solid rubber Shore 64°/73° |



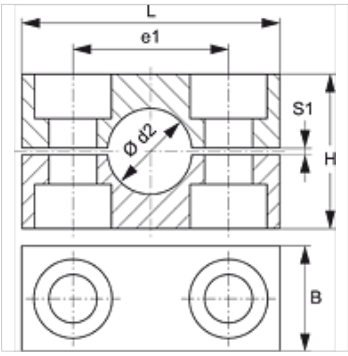


## Description

Webs in the inner surface of the clamps dampen impacts and vibrations and absorb forces along the pipe axis.
A gap between the two halves pretensions the pipe.

## Ordering information

1 piece = 2 halves of clamp

## Item

| Identification | Clamp size | External pipe Ø d2 (mm) | External pipe Ø d2 | B (mm) | e1 (mm) | H (mm) | L (mm) | S1 (mm) |
|---|---|---|---|---|---|---|---|---|
| **SRS 3006 VG** | 1 | 6,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3008 VG** | 1 | 8,0 | 5/16" | 30 | 33 | 32 | 56 | 2 |
| **SRS 3010 VG** | 1 | 10,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3012 VG** | 1 | 12,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3012.7 VG** | 1 | 12,7 | 1/2" | 30 | 33 | 32 | 56 | 2 |
| **SRS 3013.5 VG** | 1 | 13,5 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3014 VG** | 1 | 14,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3015 VG** | 1 | 15,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3016 VG** | 1 | 16,0 | 5/8" | 30 | 33 | 32 | 56 | 2 |
| **SRS 3017.2 VG** | 1 | 17,2 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 3018 VG** | 1 | 18,0 | - | 30 | 33 | 32 | 56 | 2 |
| **SRS 4019 VG** | 2 | 19,0 | 3/4" | 30 | 45 | 48 | 71 | 2 |
| **SRS 4020 VG** | 2 | 20,0 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4021.3 VG** | 2 | 21,3 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4022 VG** | 2 | 22,0 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4023 VG** | 2 | 23,0 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4025 VG** | 2 | 25,0 | 1" | 30 | 45 | 48 | 71 | 2 |
| **SRS 4026.9 VG** | 2 | 26,9 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4028 VG** | 2 | 28,0 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 4030 VG** | 2 | 30,0 | - | 30 | 45 | 48 | 71 | 2 |
| **SRS 5030 VG** | 3 | 30,0 | - | 30 | 60 | 60 | 86 | 2 |
| **SRS 5032 VG** | 3 | 32,0 | 1.1/4" | 30 | 60 | 60 | 86 | 2 |
| **SRS 5033.7 VG** | 3 | 33,7 | - | 30 | 60 | 60 | 86 | 2 |
| **SRS 5035 VG** | 3 | 35,0 | - | 30 | 60 | 60 | 86 | 2 |
| **SRS 5038 VG** | 3 | 38,0 | 1.1/2" | 30 | 60 | 60 | 86 | 2 |
| **SRS 5040 VG** | 3 | 40,0 | - | 30 | 60 | 60 | 86 | 2 |
| **SRS 5042 VG** | 3 | 42,0 | - | 30 | 60 | 60 | 86 | 2 |
| **SRS 6038 VG** | 4 | 38,0 | 1.1/2" | 45 | 90 | 90 | 117 | 3 |
| **SRS 6040 VG** | 4 | 40,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6042 VG** | 4 | 42,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6045 VG** | 4 | 45,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6048.3 VG** | 4 | 48,3 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6050 VG** | 4 | 50,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6051 VG** | 4 | 51,0 | 2" | 45 | 90 | 90 | 117 | 3 |
| **SRS 6052 VG** | 4 | 52,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6055 VG** | 4 | 55,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6057 VG** | 4 | 57,0 | 2.1/4" | 45 | 90 | 90 | 117 | 3 |
| **SRS 6060.3 VG** | 4 | 60,3 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6063 VG** | 4 | 63,0 | 2.1/2" | 45 | 90 | 90 | 117 | 3 |
| **SRS 6065 VG** | 4 | 65,0 | - | 45 | 90 | 90 | 117 | 3 |
| **SRS 6070 VG** | 4 | 70,0 | - | 45 | 90 | 90 | 117 | 3 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*

## Product versions

| | |
|---|---|
| **SRS 30-100 AL** | Pipe clamp, heavy series, Inside of clamp with web |
| **SRS 30-100 PA** | Pipe clamp, heavy series, Inside of clamp with web |
| **SRS 30-100 PP** | Pipe clamp, heavy series, Inside of clamp with web |
| **SRS 30-100 PP G** | Pipe clamp, heavy series, Inside of clamp, smooth |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*