


SRS SPR D

Series welded on base plate, double pipe clamp

HANSA FLEX

Properties

| | |
|-----------------|----------------------|
| Design | for twin pipe clamps |
| Standard | DIN 3015-3 |
| Material | Steel |
| Surface | phosphate treated |

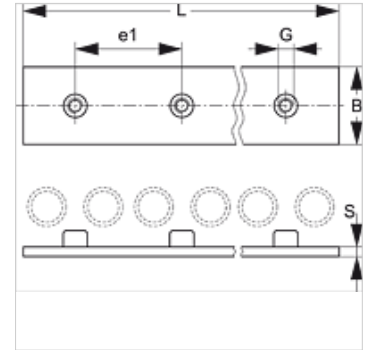

Description

Number of mountings: for 5 clamps.

Item

| Identification | Clamp size | B (mm) | e1 (mm) | G | L (mm) | S (mm) |
|----------------|------------|-----------|------------|-----|-----------|-----------|
| SRS SPR 1 D | 1 | 30 | 40 | M 6 | 196 | 3 |
| SRS SPR 2 D | 2 | 30 | 58 | M 8 | 288 | 5 |
| SRS SPR 3 D | 3 | 30 | 72 | M 8 | 358 | 5 |
| SRS SPR 4 D | 4 | 30 | 90 | M 8 | 446 | 5 |
| SRS SPR 5 D | 5 | 30 | 112 | M 8 | 558 | 5 |

Additional element for following products

B Configuration of group B