


Properties

Application	Painting applications
Special features	sturdy durable exceptionally flexible
Inner layer	EPDM (smooth)
Insert	one high tensile synthetic thread braided insert
Outer layer	EPDM (smooth)
Colour	green
Temp. min.	-40 °C
Temp. max.	100 °C
Media	Water soluble paints Fresh and sea water ketonic solvents and a range of chemicals Synthetic resin paints and polyester lacquers Alkalies Acids

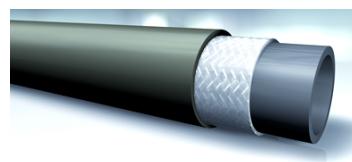

Item

Identification	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	Operating pressure (bar)
FARBSPRITZ 06-3.5	6	13	3,5	20,0
FARBSPRITZ 09-3.5	9	16	3,5	20,0
FARBSPRITZ 11-4	11	19	4,0	20,0